


CONCRETE PALISADE 1.8M H WITH FLATWRAP RAZOR ON TOP

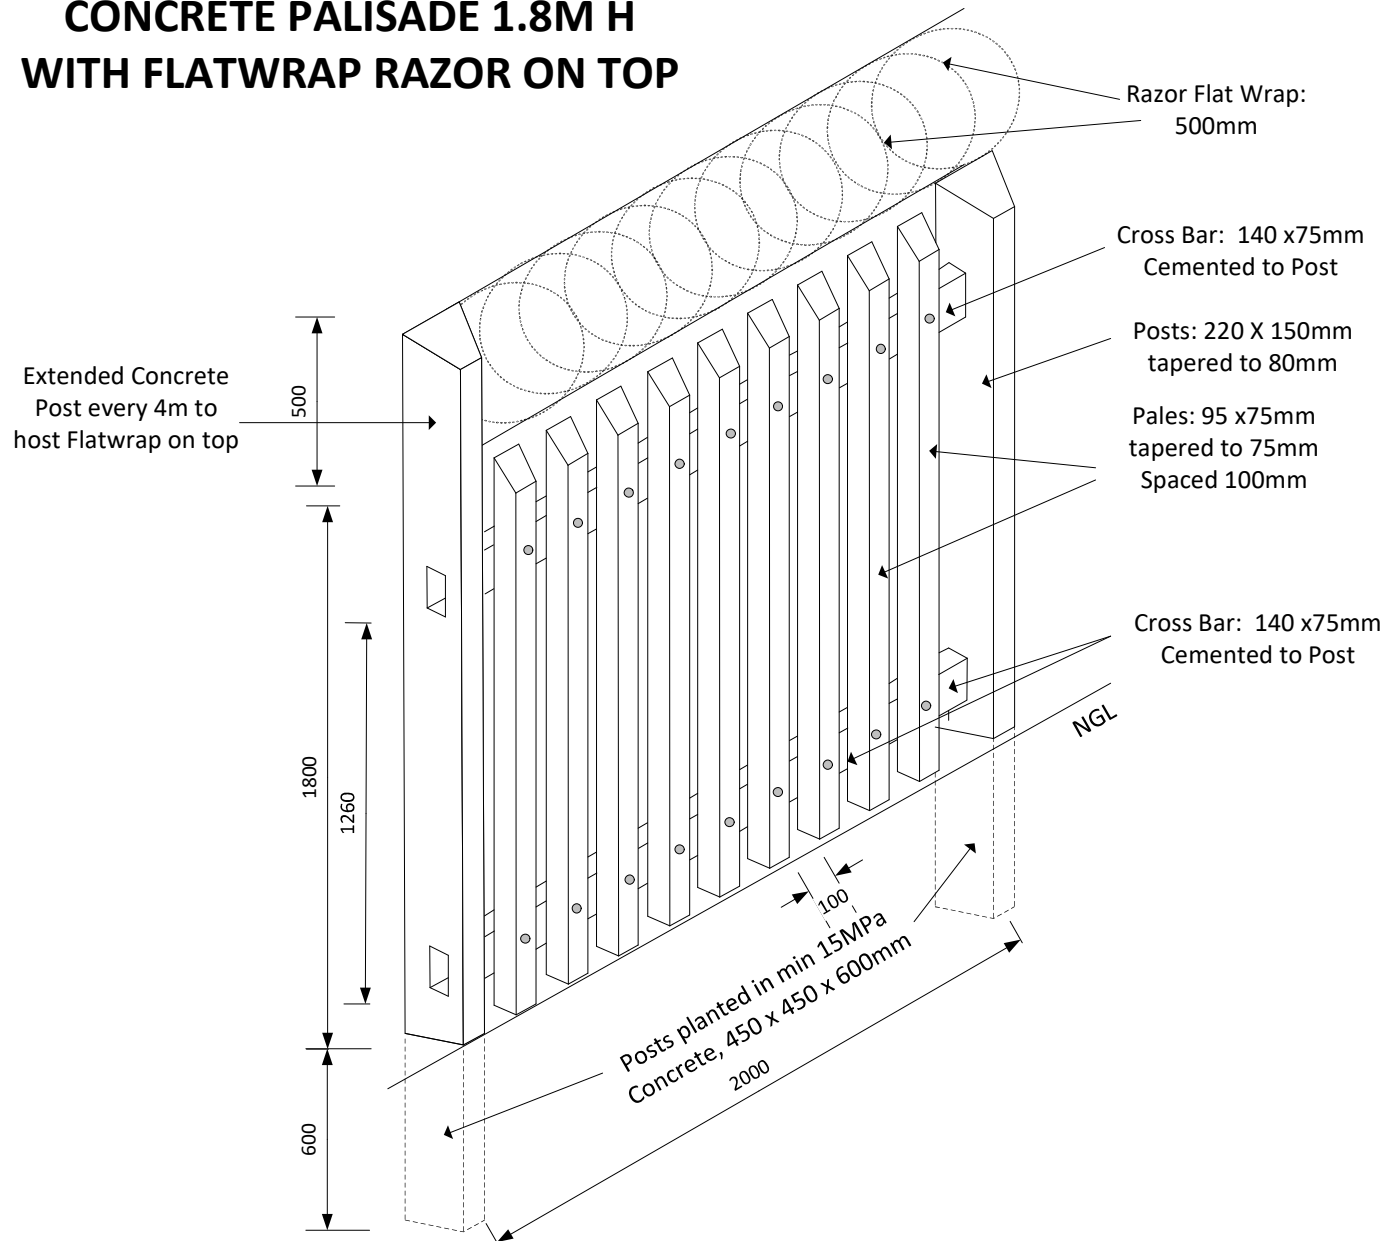

POSTS:

Overall length 2400 x 220 x 150mm tapered to 80mm. Reinforced with 4x 5.5mm steel rods.

PALES:

1800 x 95 x 75mm tapered to 75mm. Reinforced with 3x 5.5mm steel rods.

CROSS BARS:

1950 x 75 x 140mm with 8mm holes for bolts for Pales. Cross Bars are concreted to posts. Reinforces with 2x 5.5mm steel rods.

FIXING BOLTS:

8mm Bolts

FLATWRAP:

500mm High Razor Flatwrap is installed on top of the fence

INSTALLATION:

The foundation be 450mm x 450mm x 600mm deep, minimum of 15 MPA concrete. The posts are spaced at 2m centers and are slotted to take 2 horizontal rails. Each vertical pale is bolted by 2 x 8mm nuts and bolts (top and bottom) At the base of the pales a 200 x 150mm concrete plinth may be cast to give additional stability to the fence, at an additional cost.

TITLE

Concrete Palisade (1.8m H) with Flatwrap Razor on Top

DATE

April 2026

SCALE

1:20

COMPANY

Capstone Fencing

CONTACT

E-mail: sales@capstonefencing.co.za

Cell: +27 076 118 2117

