


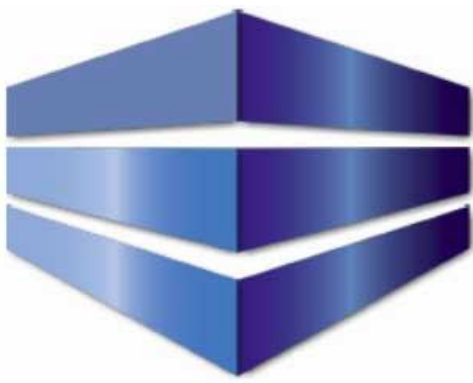

CAPSTONE 1624 CC t/a

CAPSTONE FENCING


Company Reg No: 2003/063968/23 VAT Reg No: 4940220710

Cell: 083 455 7212

Office: 062 5426 185

info@capstonefencing.co.za / sales@capstonefencing.co.za

1.8 m Concrete Palisade Fencing Specifications With Razor Wire

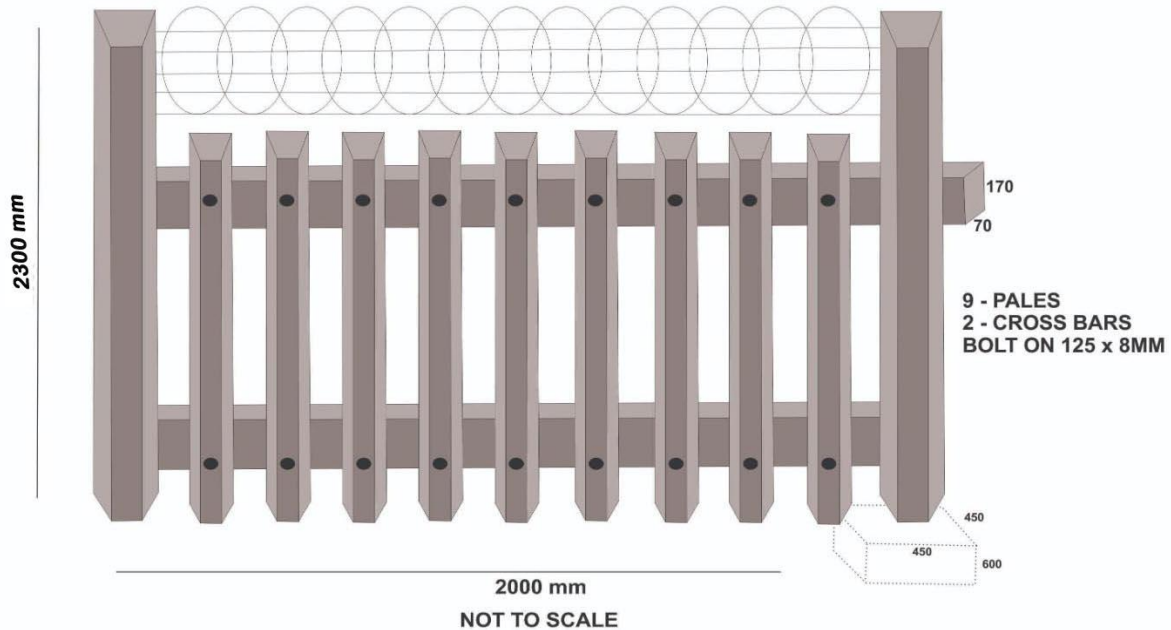

Specifications - 1.8m High Concrete Palisade Fencing with Razor Wire on top - 9 pales per 2m Section

POSTS:	Overall length 2900 x 150 x 220 tapered to 80mm Reinforcement - 4 No. 5.5mm steel rods	STRENGTH: Concrete strength of 20-34 MPa (depending on time period of curing)
PALES:	1800 x 95 x 75 tapered to 75mm Reinforcement - 3 No 5.5mm steel rods	
CROSS BARS:	1950 x 75 x 140mm with 9. No 8mm holes Reinforcement - 2 No. 5.5mm steel rods	
FIXING BOLTS:	8mm bolts	
RAZOR WIRE:	500mm Razor Flatwrap on top with 2.24mm straining wires	
INSTALLATION:	The foundation be 450mm x 450mm x 600mm deep, minimum of 15 MPA concrete. The posts are spaced at 2m centers and are slotted to take 2 horizontal rails. Each vertical pale is bolted by 2 x 8mm nuts and bolts (top and bottom) At the base of the pales a 200 x 150mm concrete plinth may be cast to give additional stability to the fence, at an additional cost.	